


**MOTORIZED GLOBE VALVE / THREE WAY
GRAY CAST IRON BODY
PN 16 FLANGED**

SERIES : 773

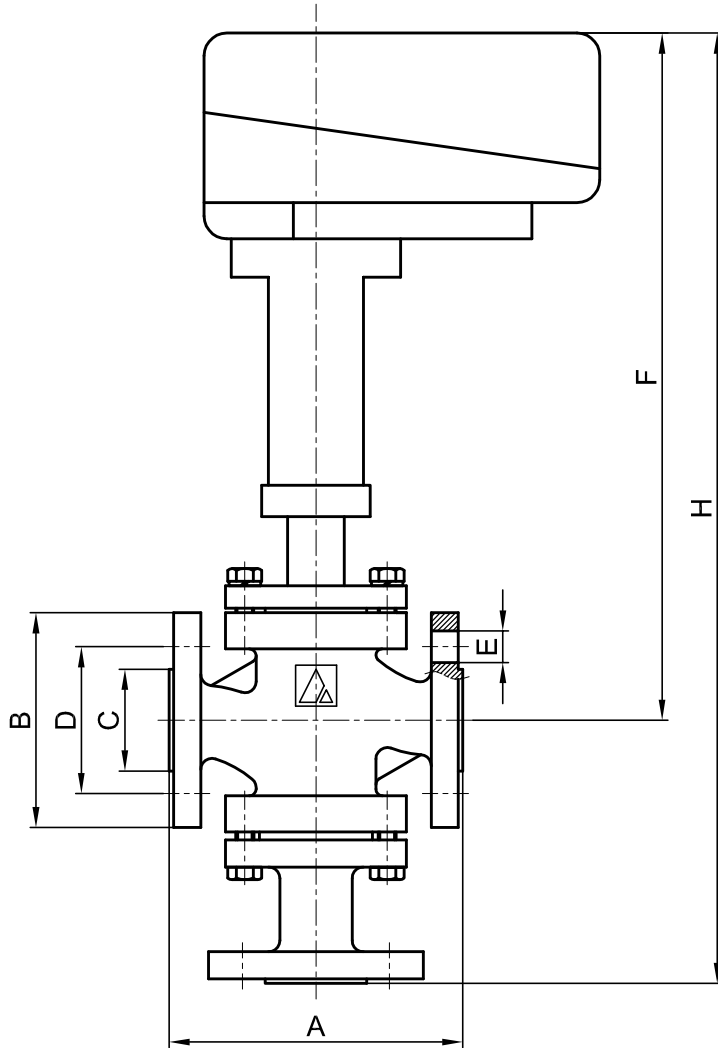

DN	MOTOR POWER	24 VAC On-Off	230 VAC On-Off	0 - 10 V Proportional
15	1600 N			√
	2000 N	√	√	√
20	1600 N			√
	2000 N	√	√	√
25	1600 N			√
	2000 N	√	√	√
32	1600 N			√
	2000 N	√	√	√
40	2000 N	√	√	√
50	2000 N	√	√	√

A	B	C	D	E	Hole	F	H	G	Kv m³/h
130	Ø95	Ø45	Ø65	Ø14	4	305	352,5	G 1/8"	4,9
150	Ø105	Ø60	Ø75	Ø14	4	310	362,5	G 1/8"	7,6
160	Ø115	Ø70	Ø85	Ø14	4	315	372,5	G 1/8"	13,7
180	Ø140	Ø80	Ø100	Ø18	4	330	400	G 1/8"	20,7
200	Ø150	Ø90	Ø110	Ø18	4	335	410	G 1/8"	34,2
230	Ø165	Ø100	Ø125	Ø18	4	340	422,5	G 1/8"	48,6



ALFANOX