


**STAINLESS STEEL
BUTT WELDED & FLANGED
THREE WAY / PNEUMATIC ON-OFF VALVE**


SERIES : 503



DN		PISTON	A	B	C	H	G	Kv m ³ /h	WEIGHT (KG)
15	1/2"	Ř 63	150	65	180	245	G 1/8"	4,2	2,90
20	3/4"		150	70	190	260		6,5	3,00
25	1"	Ø 80	160	80	210	290		11,8	3,20
32	1 1/4"		180	105	220	325		17,8	4,00
40	1 1/2"	Ø 100	200	115	250	365		29,3	6,30
50	2"		230	130	260	390		41,7	6,80

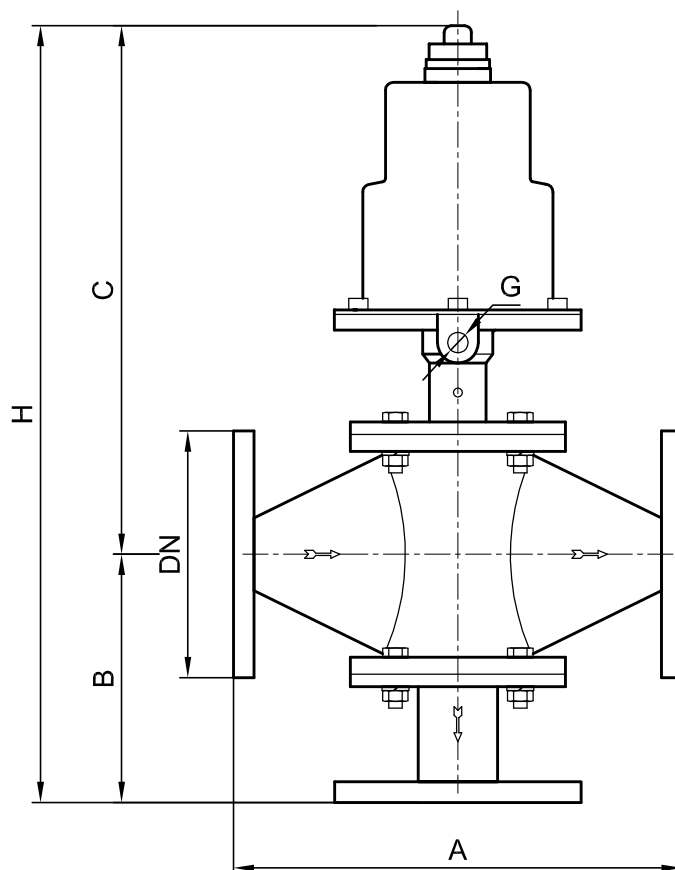

ALFANOX

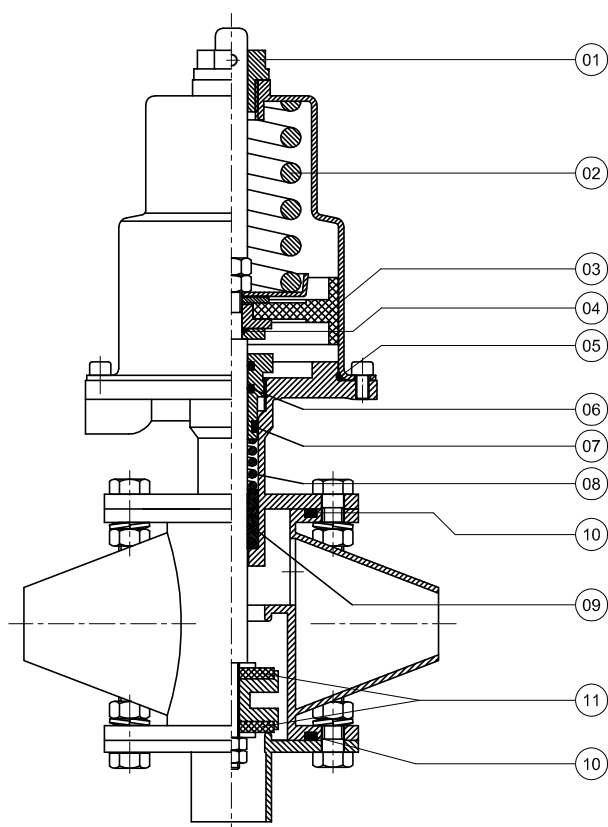

INSTRUCTIONS :


1. Valve can be fitted in any position.
2. Flow direction should be as indicated by an arrow on the body.
3. Working pressure for each size of valve should not be exceed the limits indicated in the chart.
4. Control pressure should not exceed the maximum and should not go lower then the minimum value.
5. CAUTION : Never fasten or remove the bolts & nuts prior to applying pressurized air.

For the spare part orders, notifying us about the part number at the chart below and also the serial number on the valve are adequate.


SPARE PART LIST		
PART NO	PART NAME	MATERIAL
01	UPPER SPINDLE GUIDE	NYLON 66
02	SPRING (SINGLE)	INOX
03	PISTON GROUP	NBR+BRASS
04	PISTON O-RING	NBR
05	CYLINDER O-RING	SILICONE
06	STUFFING BOX O-RING	SILICONE
07	STUFFING BOX GASKET	SILICONE
08	STUFFING BOX SPRING	INOX
09	STUFFING BOX V-CHEVRON	PTFE
10	BODY SEALING O-RING	NBR / SILICONE
11	SEAT SEAL	EPDM / PTFE / VITON



NORMALLY CLOSED

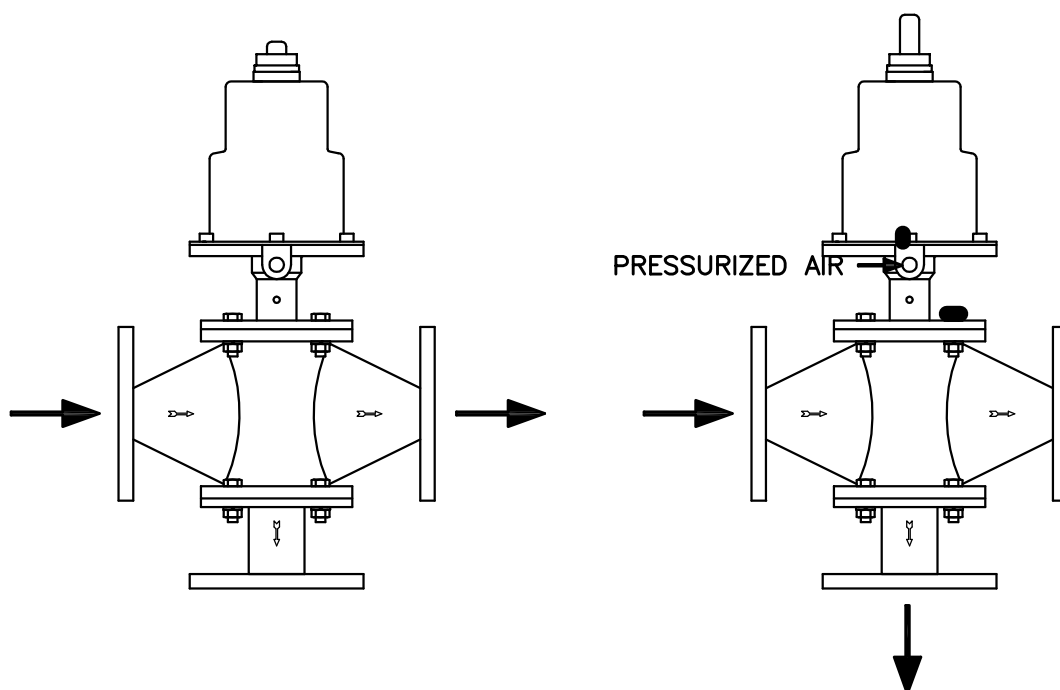

NORMALLY OPEN

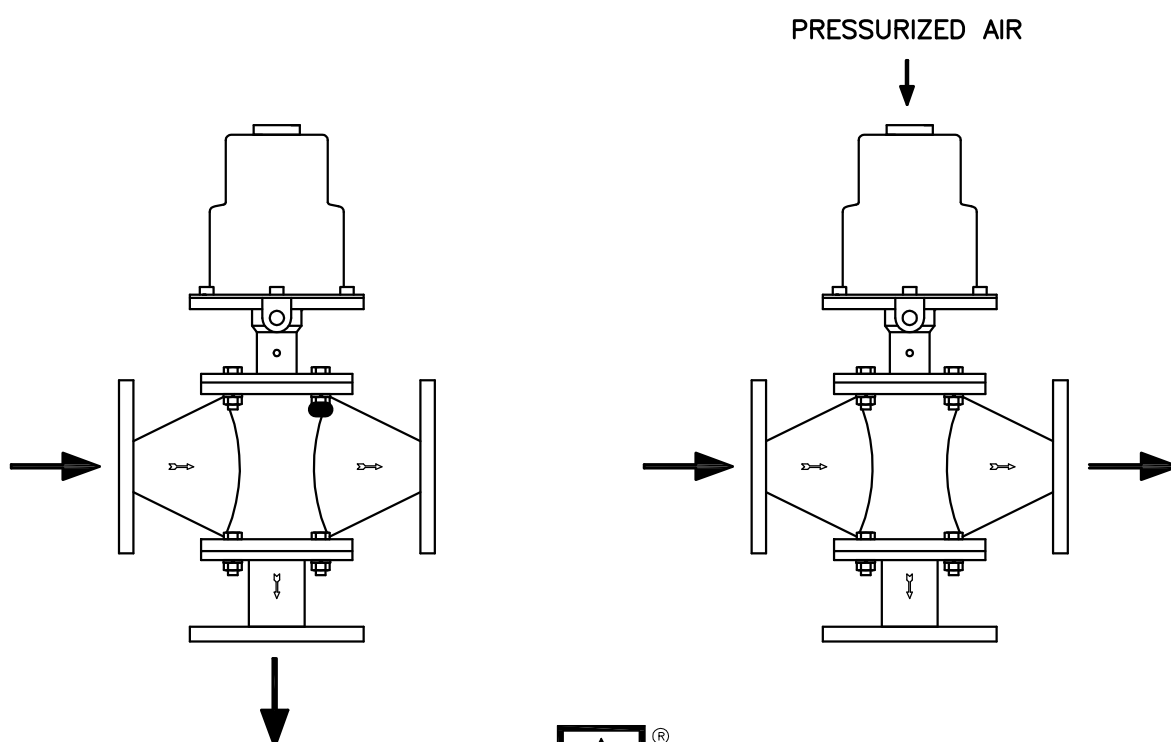

ALFANOX