


STAINLESS STEEL NIPPLE & COUPLING ENDS FULL LIFT SAFETY VALVE

SERIES : 742

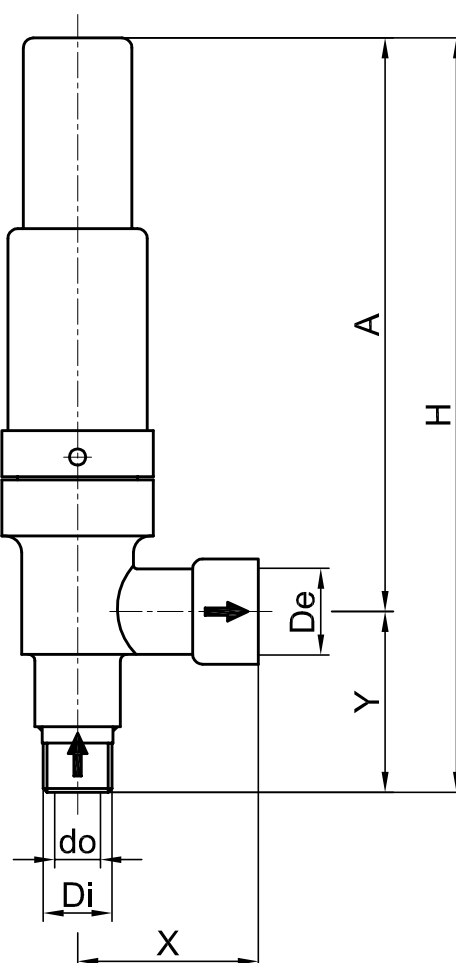

DN	do	Di	De	X	Y	A	H
10 / 15	15	G 3/8"	G 1/2"	55	45	180	225
15 / 20	15	G 1/2"	G 3/4"	55	45	180	225
20 / 25	15	G 3/4"	G 1"	65	50	205	255
25 / 32	17	G 1"	G 1 1/4"	80	65	215	280
32 / 40	22	G 1 1/4"	G 1 1/2"	85	70	280	350
40 / 50	27	G 1 1/2"	G 2"	100	85	285	370


Set Pressure Range : 0.1 - 12 bar (2 - 174 psi)



ALFANOX

INSTRUCTIONS :

1. Beware to the inlet and outlet directions while mounting the valve.
2. Pressure values are adjusted sensitively so do not change the adjustment.
3. The top cover of the valve has not to be opened. Do not loosen or tighten the bolt and nut.
4. Unauthorized people must not interfere to the valve.

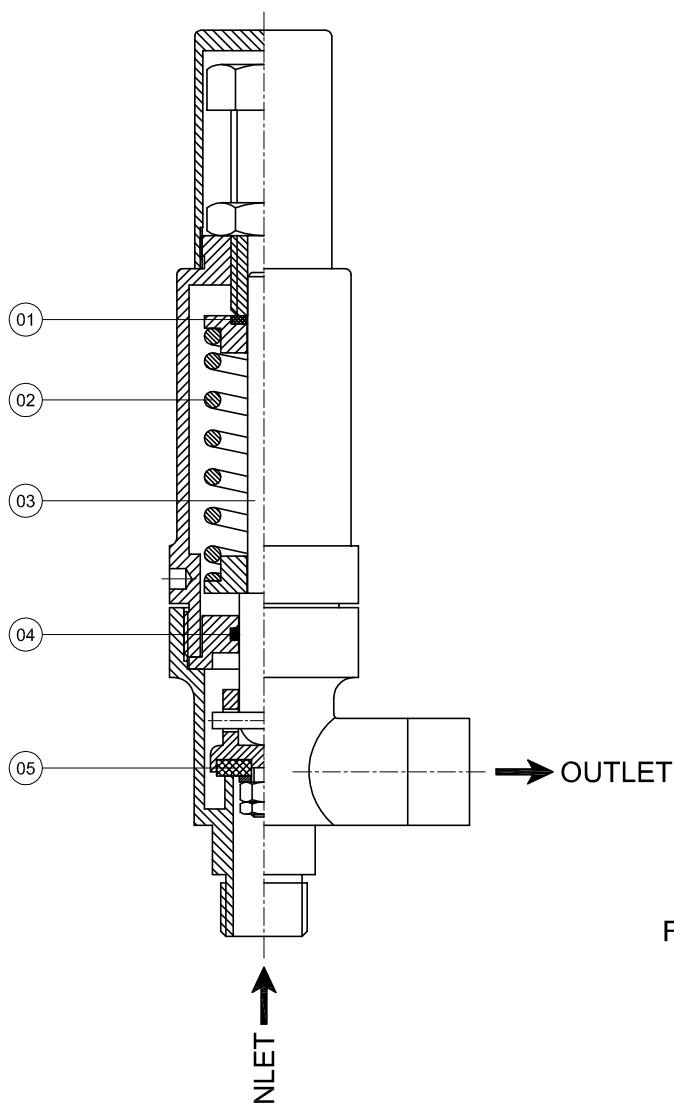

For the spare part orders, notifying us about the part number at the chart below and also the serial number on the valve are adequate.

SPARE PART LIST		
PART NO	PART NAME	MATERIAL
01	WASHER	PTFE
02	SPRING	INOX
03	STEM	INOX
04	O-RING	SILICONE
05	SEAT SEAL	VITON
05	SEAT SEAL	PTFE

